




DETAIL E

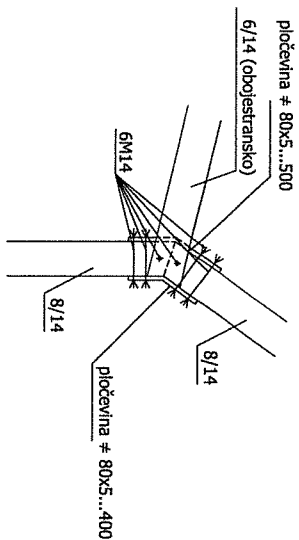


DETAIL F

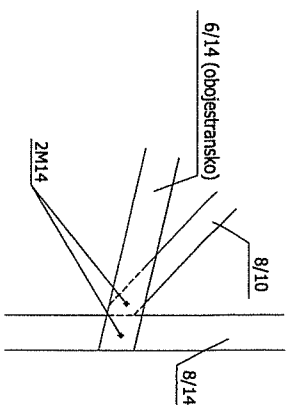


DETAIL A

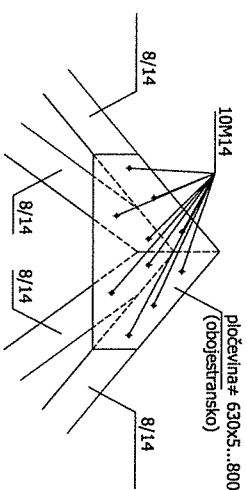


DETAIL B

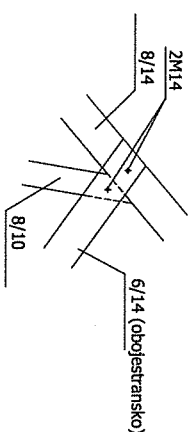


DETAIL G

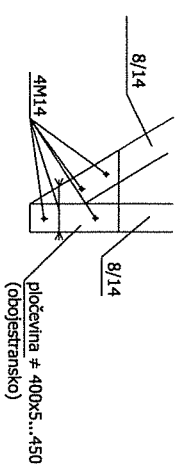

DETAIL C

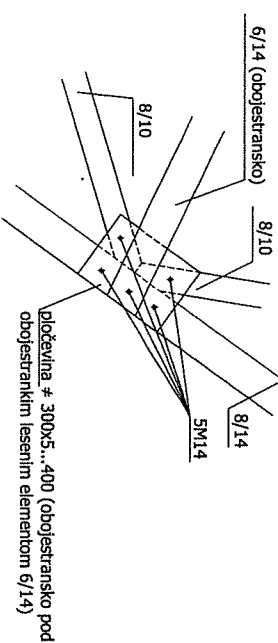


DETAIL D


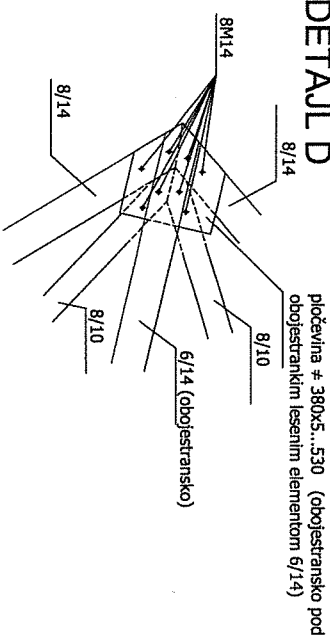


DETALJI SPAJANJA NOSILNIH ELEMENTOV
KOZOLCA



JEKLO: S 235
LES: C 24



—snegolovi točkovni, sivi, 6kom/m²
—dvojno prekrivanje
—eternit 30/40, pravokotni vogali
—letvanje
—perna zapora
—OSB plošča

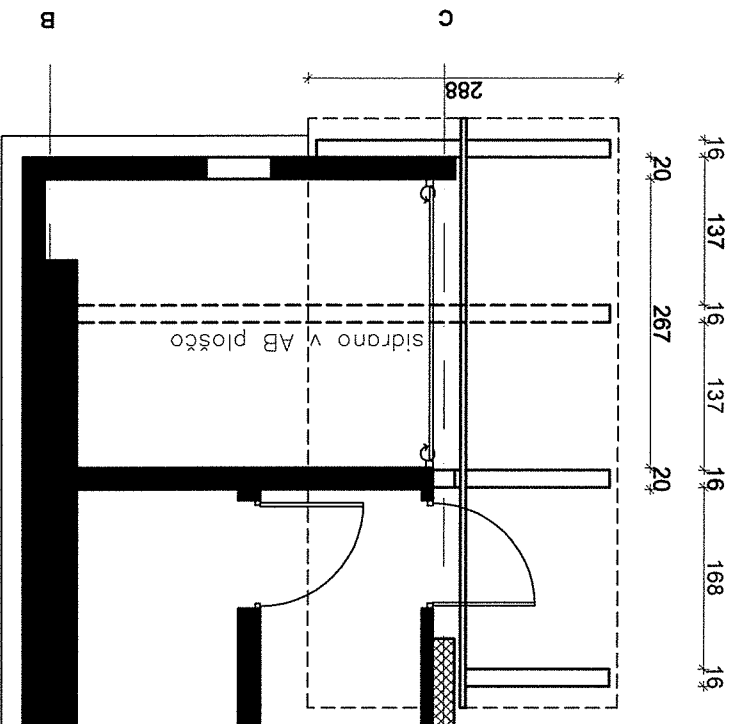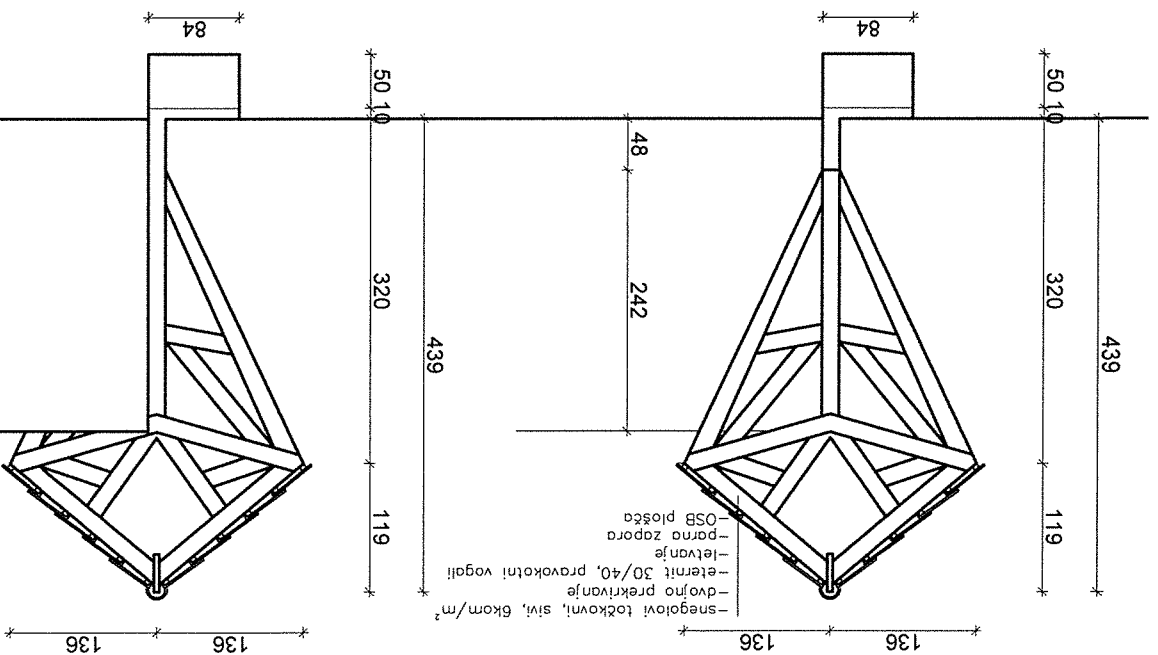


—suh smrekov les l.kvalitete
—gladko brušen
—impregniran kot naprimer s Silvanol
—prezezi lesenih elementov v skladu s statiko

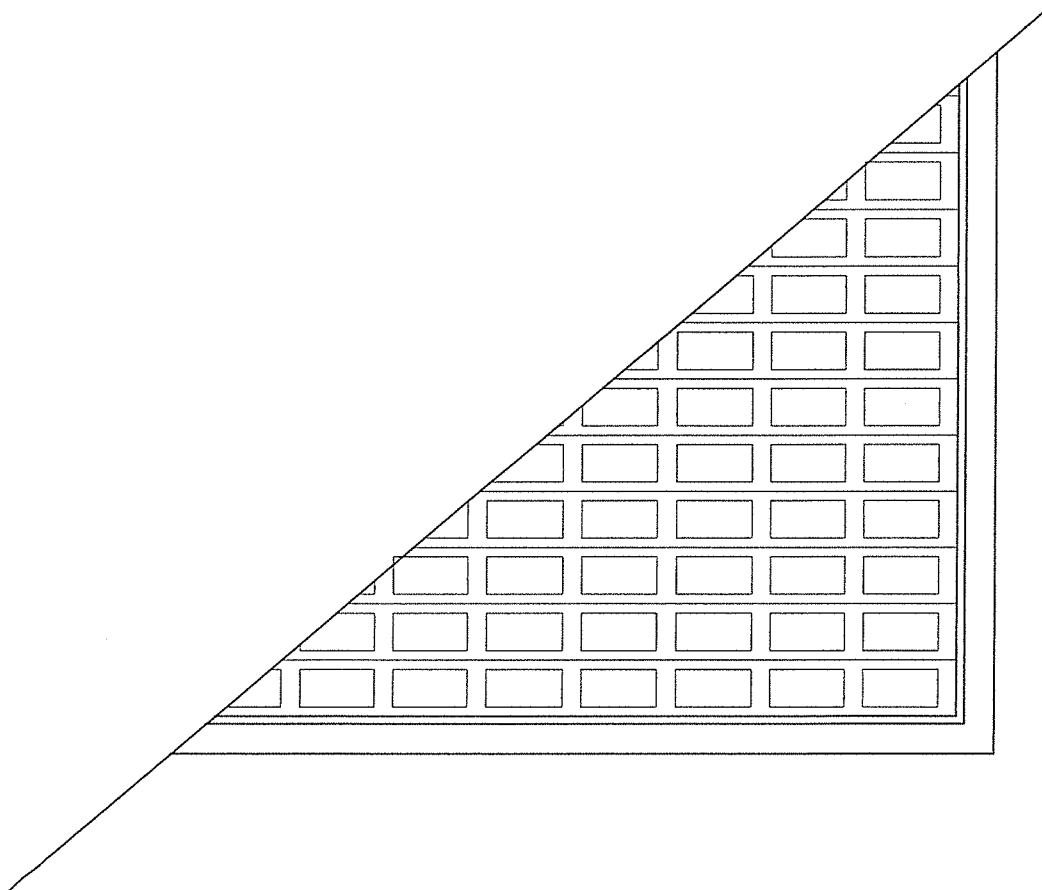


- vrata v agregat so rolo mreža, močno perforirana (vsaj 50% površine)
- ključavnica cilindrska, sistemska
- odpiranje ročno
- finalna obdelava — *RAL 1002 mat*

ZASLON TOPLOTNE POSTAJE

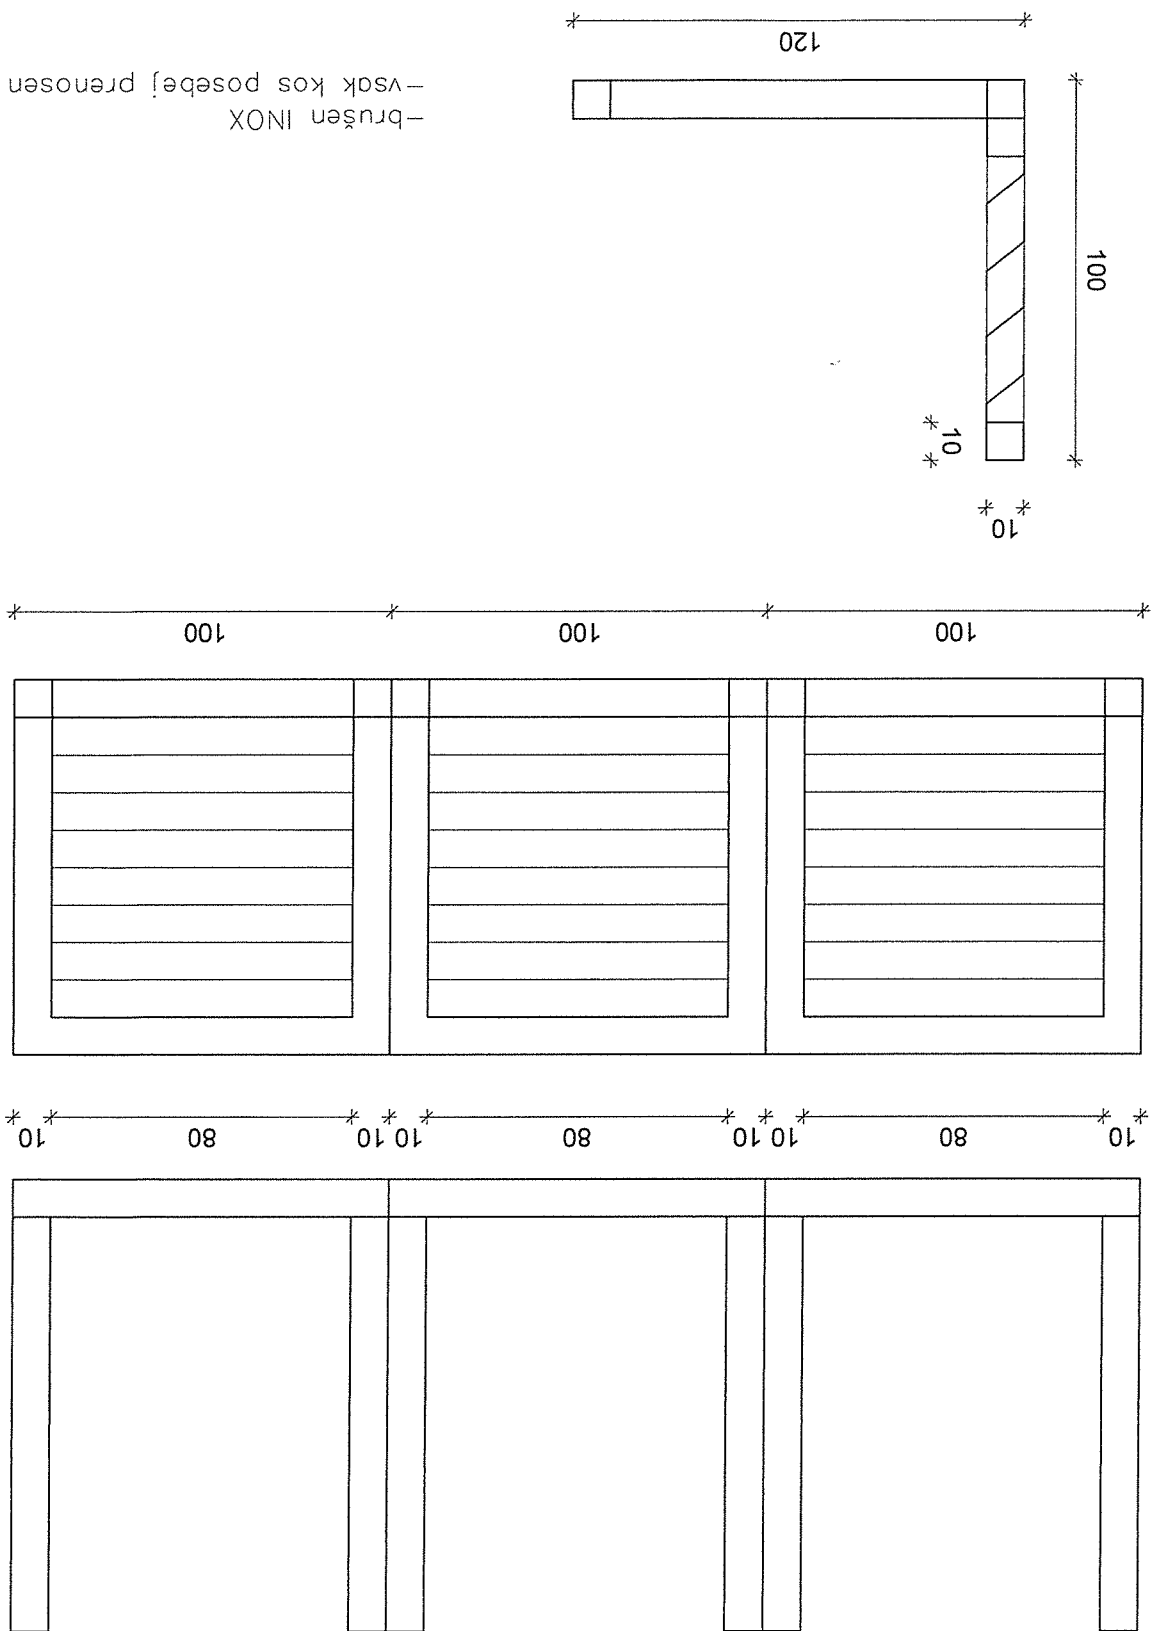

—brušen INOX
—vsak kos posebej prenositi



- IZ OSTANKA U PROFILA 300
- 2 KOM
- VROČE ŽN (GINKAKO)
- BETON C 25/30

